

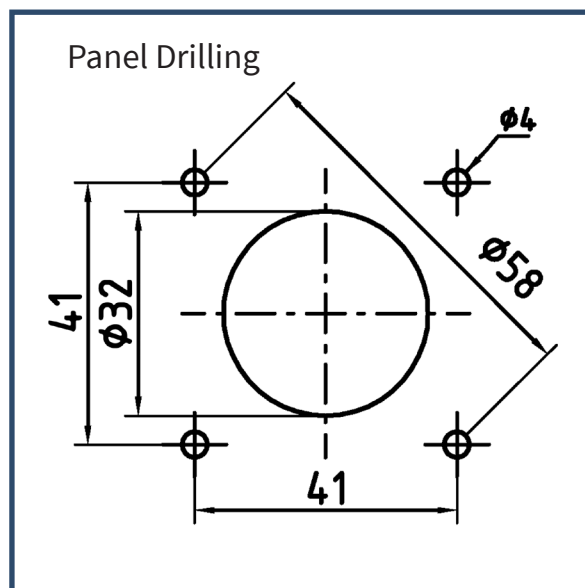


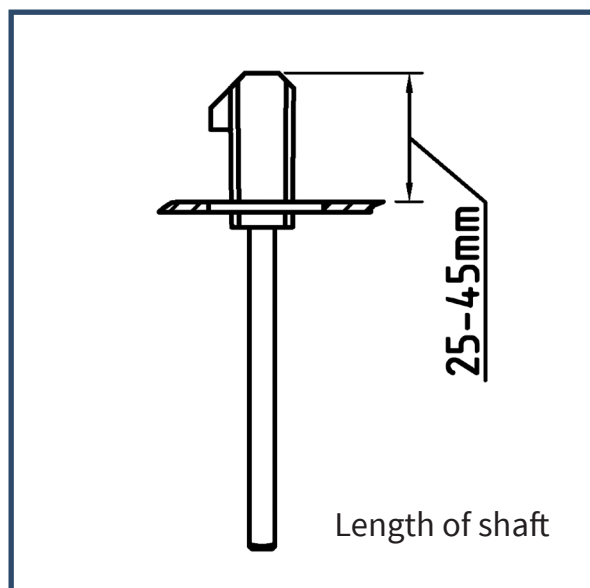

Padlockable in 0-position

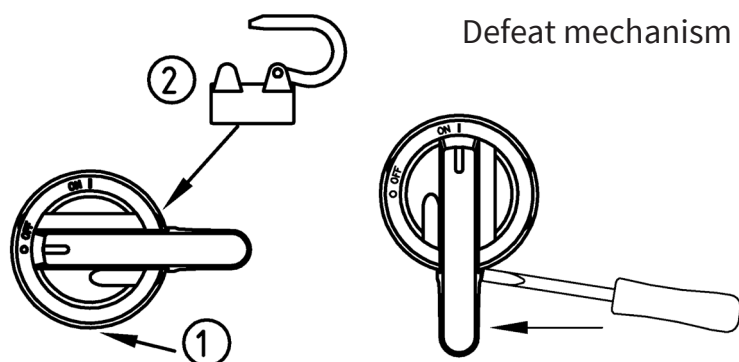


Suitable for Cu cables 6-70mm².


When connecting, please note maximum torque for the terminal screws: 6Nm. Allen key size 5. Please ensure that the screw is not cross-threaded. Maximum torque for the shaft holder screw: 1 Nm.

Fuse covers are installed by pushing gently from the lower edges and snapping them into place (A).

Terminal shrouds are installed by sliding downwards until they snap into place (B).

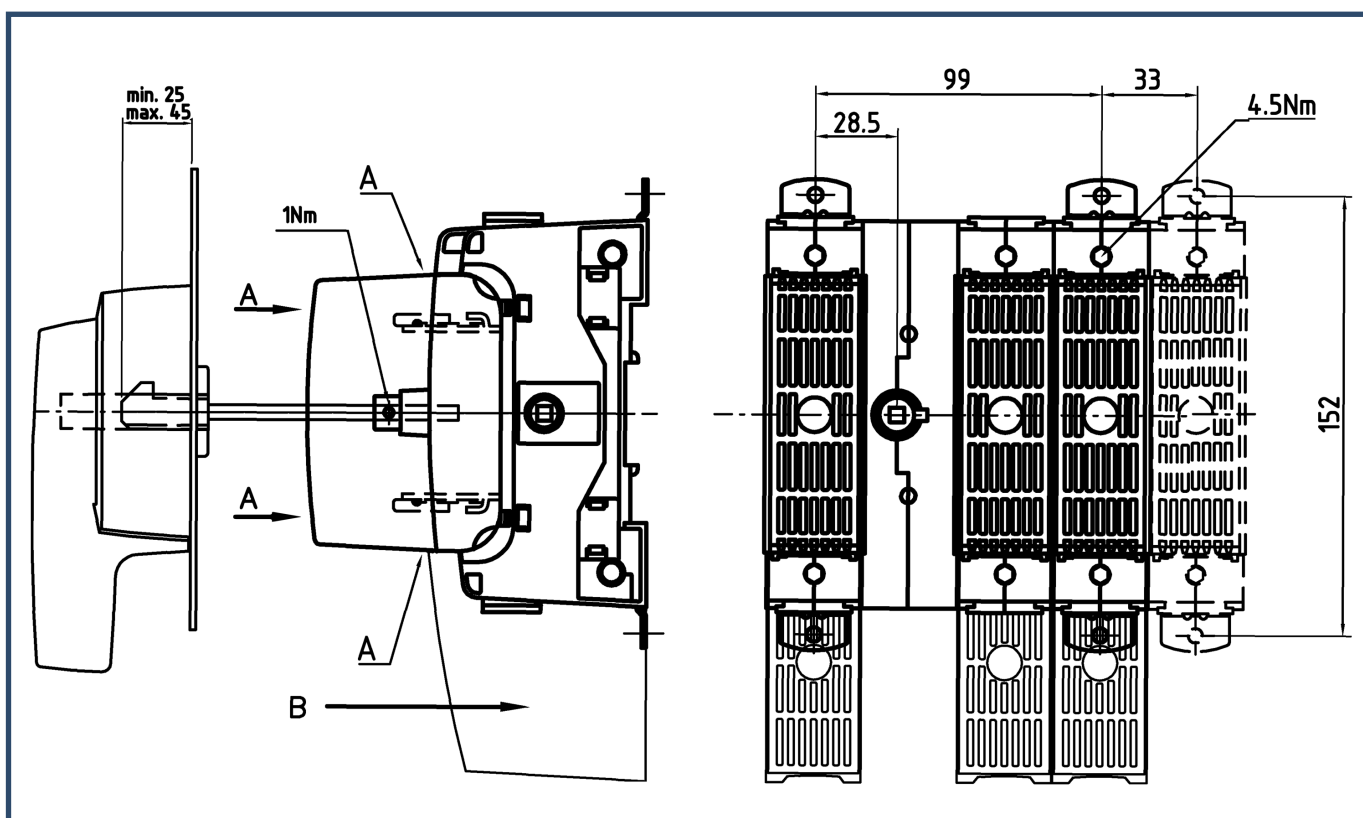

Riippulukitus 0-asennossa

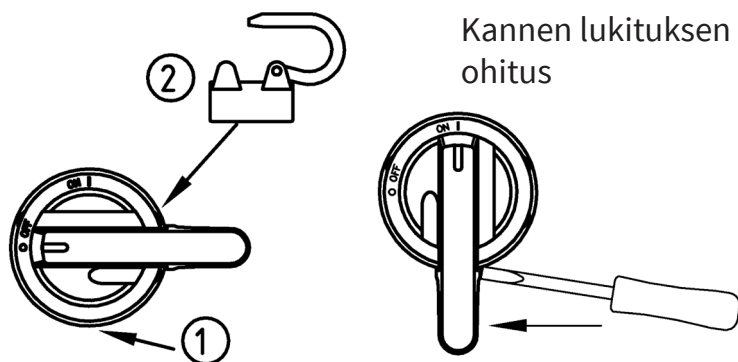

Tuppiloliittimen kaapelikoko 6- 70mm 2 Cu
Liitinruuvien suurin vääntömomentti: 6Nm.
Kuusiokoloavain koko 5mm. Varmista että
ruuvi menee oikeille kierteille. Akselin
pidätinruuvien suurin vääntömomentti: 1 Nm.
Sulakesuojat asennetaan painamalla suojan
alareunasta ja napsauttamalla paikalleen (A).
Liitinsuojat asennetaan painamalla alaspäin
kunnes napsahtavat kiinni (B).

